


Data sheet

Sensor-switched indoor light

RS LED M1

V2 Stainless steel

EAN 4007841052492



Function description

Tasteful design for indoors. High-quality and, at only 9,5 W, extremely energy-efficient RS LED M1 indoor light in stainless-steel or chrome finish. With a 360° high-frequency sensor inside the enclosure (ø 3 - 8 m reach). Night-light function and 4-hour manual override (3000 K). Light output of 560 lm for classy ambient lighting and perfect illumination in corridors, hallways or stairwells.

Technical specifications

Dimensions (L x W x H)	200 x 200 x 53 mm
Mains power supply	220 – 240 V , 50 / 60 Hz
Sensor Technology	High frequency
Transmitter power	< 1 mW
Output	9,5 W
Interconnection	Yes
Luminous flux	560 lm
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	65000 h
Drop in luminous flux in accordance with LM80	L70B10
Base	without
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection	also through glass, wood and stud walls

Data sheet



Sensor-switched indoor light

RS LED M1

V2 Stainless steel

EAN 4007841052492

Technical specifications

Detection angle	360 °
Angle of aperture	160 °
Electronic scalability	Yes
Mechanical scalability	No
Reach, tangential	Ø 8 m (50 m ²)
Continuous light	selectable, 4h
Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	5 sec – 15 min
Basic light level function	Yes
Basic light level function time	10/30 min, all night
Basic light level function percentage, from	10 %
Soft light start	Yes
Impact resistance	IK00
IP rating	IP20
Protection class	II
Ambient temperature	-10 – 30 °C
Housing material	Plastic
Cover material	Plastic, opal
Manufacturer's Warranty	3 years
Version	Stainless steel
PU1, EAN	4007841052492

Data sheet




Sensor-switched indoor light

RS LED M1

V2 Stainless steel

EAN 4007841052492

Mood image

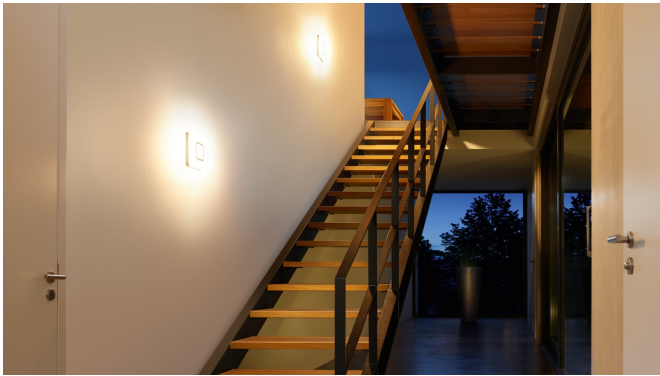

Data sheet



Sensor-switched indoor light

RS LED M1

V2 Stainless steel

EAN 4007841052492