


Data sheet

Sensor-switched outdoor light

L 665 LED

V2 Anthracite

EAN 4007841053949

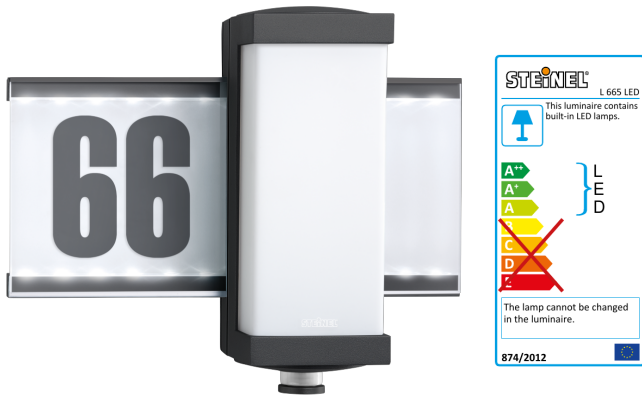

Function description

Cool looker. Designer sensor-switched outdoor light L 665 LED, ideal for building walls and entrance areas, 10 W STEINEL LED light system, 360° angle of coverage, reach up to 7 m, basic light-level function and soft light start.

Technical specifications

Dimensions (L x W x H)	122 x 232 x 269 mm
Mains power supply	220 – 240 V , 50 / 60 Hz
Mounting height max.	2,50 m
Sensor Technology	passive infrared
Output	10 W
Interconnection	Yes
Luminous flux	750 lm
Efficiency	65 lm/W
Colour temperature	3000 K
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Base	without
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	360 °
Sneak-by guard	Yes

Sensor-switched outdoor light

L 665 LED

V2 Anthracite

EAN 4007841053949

Technical specifications

Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	r = 1.5 m (7 m ²)
Reach, tangential	r = 7 m (154 m ²)
Photo-cell controller	Yes
Twilight setting	2 – 1000 lx
Time setting	5 sec – 15 min
Basic light level function	Yes
Basic light level function time	10/30 min, all night
Basic light level function percentage, from	10 %
Basic light level function percentage, up to	10 %
Soft light start	Yes
Impact resistance	IK07
IP rating	IP44
Protection class	I
Ambient temperature	-20 – 50 °C
Housing material	Aluminium
Cover material	Plastic, opal
Manufacturer's Warranty	5 years
With remote control	No
Version	Anthracite
PU1, EAN	4007841053949

Data sheet



Sensor-switched outdoor light

L 665 LED

V2 Anthracite

EAN 4007841053949

Mood image

