

Motion detector - Professional Line

IS 345 MX Highbay

PF - surface, sq.

EAN 4007841 010522



infrared sensor
360°



max. 30 x 4 m

2000w

2000 W max.
(LED-ready)



IP54



2 - 1000 lux



5 sec - 15 min



manual override



ideal 4 - 14 m

TEACH

Teach mode



energy saving

Function description

Surveillance on the highest level. Infrared motion detector IS 345 MX Highbay for indoors, ideal for large heights in depots, high-bay warehouses, machine shops, check-in areas and departure lounges, installation height 14 m, detection zone 30 x 4 m (radial), large terminal compartment for easy installation, heavy-duty relay for high switching capacity. Available as square surface-mounted and concealed version.

IS 345 MX Highbay

PF - surface, sq.

EAN 4007841 010522

Technical specifications

Type	Motion detectors	Fluorescent lamps, series-corrected	400 VA
Dimensions (L x W x H)	65 x 95 x 95 mm	Fluorescent lamps, parallel-corrected	400 VA
Mains power supply	220 – 240 V / 50 – 60 Hz	Switching output 1, low-voltage halogen lamps	2000 VA
Sensor Technology	passive infrared	LED lamps	100 W
Application, place	Indoors	LED lamps > 2 W	300 W
Installation site	ceiling	LED lamps > 8 W	600 W
Installation	Surface wiring	Capacitive load in μ F	176 μ F
Mounting height	4,00 – 14,00 m	Constant-lighting control	No
Reach, radial	30 x 4 m (120 m ²)	Basic light level function	No
Reach, tangential	30 x 4 m (120 m ²)	Functions	Normal / test mode, Manual ON / ON-OFF
Detection angle	360 °	Settings via	Remote control, Potentiometers, Smart Remote
Angle of aperture	45 °	With remote control	No
Switching zones	280 switching zones	Interconnection	Yes
Optimum mounting height	12 m	Type of interconnection	Master/master
Mechanical scalability	No	IP-rating	IP54
Sneak-by guard	Yes	Material	Plastic
Capability of masking out individual segments	Yes	Ambient temperature	-20 – 50 °C
Electronic scalability	No	Application, room	high-bay warehouse, Indoors
Twilight setting TEACH	Yes	Colour	white
Twilight setting	2 – 1000 lx	Colour, RAL	9003
Time setting	5 s – 15 Min.	Manufacturer's Warranty	5 years
Output	2000 W	Version	PF - surface, sq.
Fluorescent lamps, electronic ballast	1500 W	PU1, EAN	4007841010522
Fluorescent lamps, uncorrected	1000 VA		

Accessories


EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 559410	Service remote control RC8
EAN 4007841 056711	Black cover for IR-sensors

IS 345 MX Highbay


PF - surface, sq.

EAN 4007841 010522

Detection Zone



Dimension Drawing

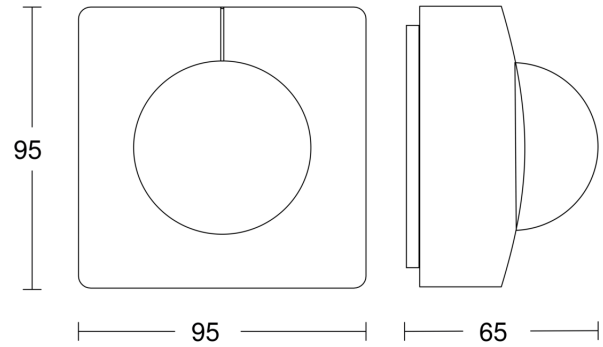

Mögliche Montagehöhe: 4,00 m – 14,00 m

Orange: radial und tangential

Master circuit diagram

