

HF 360-2

IP - concealed
 EAN 4007841 065973
 Article number 065973



high frequency sensor 360°



max. Ø 12 m



IP20



ideal 2.5 - 3.5 m



2 - 2000 lux



temperature



air humidity



energy saving



plastic free packaging

5 years

manufacturer's warranty
steinel-professional.de/garantie

Function description

Smart surveillance professional. The HF 360-2 from the new Control PRO 2 range. Modern look and intelligent 360° HF sensor technology – ideal for stairwells and toilet facilities with cubicles. Conveniently adjusted and interconnected via Bluetooth. Interfaces: COM1, COM2, DALI-2 APC, DALI-2 IPD, KNX, IP and BT IPD (Slave). Mounting height up to 3.5 m. Reach: 12 m.

Technical specifications

Type	Presence detector
Dimensions (L x W x H)	65 x 103 x 103 mm
Mains power supply	18 – 55 V
Power supply, detail	Passive PoE SELV, standard PoE (IEEE 802.3 af)
Sensor Technology	High frequency
Application, place	Indoors
Installation site	ceiling
Installation	Concealed wiring
Mounting height	2,50 – 4,00 m
Reach, radial	Ø 12 m (113 m ²)
Reach, tangential	Ø 12 m (113 m ²)
Reach, detail	1 or 2 detection directions can be masked out by stickers for adjustment to the room situation.
HF-system	5,8 GHz
Detection angle	360 °
Angle of aperture	140 °
Optimum mounting height	2,8 m
Mechanical scalability	No
Sneak-by guard	Yes
Capability of masking out individual segments	No

Electronic scalability	Yes
Detection	also through glass, wood and stud walls
Twilight setting TEACH	No
Twilight setting	2 – 2000 lx
Constant-lighting control	No
Basic light level function	No
Settings via	Bluetooth, Web-Interface
With remote control	No
Interconnection	Yes
IP-rating	IP20
Material	Plastic
Ambient temperature	-25 – 50 °C
Application, room	function room / ancillary room, kitchenette, stairwell, WC / washroom, Indoors
Colour	white
Colour, RAL	9003
Manufacturer's Warranty	5 years
Version	IP - concealed
PU1, EAN	4007841065973

Presence detector - Professional Line

HF 360-2


IP - concealed

EAN 4007841 065973

Article number 065973



Detection Zone

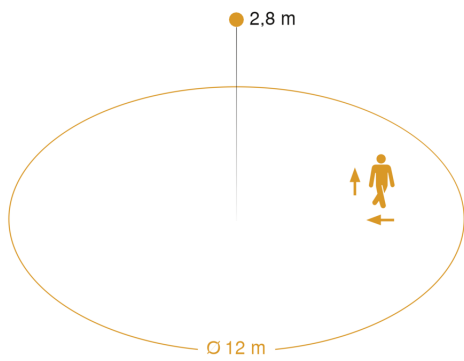

Mögliche Montagehöhe: 2,50 m – 4,00 m
Orange: radial und tangential

Dimension Drawing

