

Presence detector - Professional Line

True Presence

V3.0 KNX - concealed white

EAN 4007841 056339

Article number 056339



high frequency
sensor 360°



Movement Ø 15 m



Presence Ø 15 m



True Presence Ø 9
m



brightness



air humidity



temperature



KNX



2 - 12 m



2 - 2000 lux

Function description

The world's first true presence detector! No unnecessary stay-ON times any more – no unnecessary electricity costs. Precision high-frequency measurement of the surrounding area provides 100 per-cent reliable detection. The True Presence detector reliably identifies whether persons are present or absent over an area of 64 m² – on the basis of the body's micro movements as well as human vital functions, such as breathing in and out, or shoulder movement. The new standard in building automation.

True Presence

V3.0 KNX - concealed white
 EAN 4007841 056339
 Article number 056339



Technical specifications

Type	Presence detector
Dimensions (L x W x H)	32 x 103 x 103 mm
Power supply, detail	KNX bus
Sensor Technology	High frequency
Application, place	Indoors
Installation site	ceiling
Installation	Concealed wiring
Mounting height	2,00 – 12,00 m
Reach, radial	Ø 15 m (177 m ²)
Reach, tangential	Ø 15 m (177 m ²)
Reach, presence	Ø 15 m (177 m ²)
True Presence reach	Ø 9 m (64 m ²)
HF-system	7,2 GHz
Detection angle	360 °
Angle of aperture	160 °
Optimum mounting height	2,8 m
Mechanical scalability	No
Sneak-by guard	Yes
Capability of masking out individual segments	No
Electronic scalability	Yes
Detection	also through glass, wood and stud walls

Twilight setting TEACH	Yes
Twilight setting	2 – 1000 lx
Time setting	30 s – 1092 Min.
Constant-lighting control	Yes
Basic light level function	Yes
KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 4x, Humidity output, Presence output, Day / night function, Dewpoint, Temperature output, Logic gate
With bus coupling	Yes
Einstellungen via: Connect Bluetooth Mesh	ETS software, Bluetooth, Bus
With remote control	No
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
IP-rating	IP20
Material	Plastic
Ambient temperature	0 – 40 °C
Application, room	classroom, lecture hall, one-person office, open-plan office, high-bay warehouse, production facilities, conference room / meeting room, hotel room, care room, duty room, recreation room, dining hall / staff restaurant, changing room, kitchenette, sports hall, reception / lobby, WC / washroom, warehouse, Indoors
Colour	white
Colour, RAL	9003
Manufacturer's Warranty	5 years
Version	KNX - concealed white
PU1, EAN	4007841056339


Accessories

EAN 4007841 063887 Surface-mounting adapter for True Presence KNX

True Presence

V3.0 KNX - concealed white
EAN 4007841 056339
Article number 056339

Detection Zone

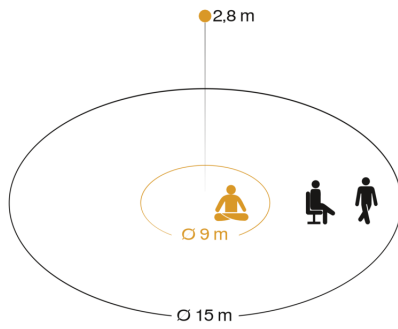

Mögliche Montagehöhe: 2,00 m – 12,00 m
Orange: True Presence
Schwarz: Bewegung und Präsenz

Dimension Drawing

