

Sensor-switched LED floodlight

LS 300 LED

black

EAN 4007841 067571

Article number 067571



LED

30 years (Ø 4,5h / day)

4000 K

4000K neutral white



infrared sensor 240°



max. 12 m



IP44



2 - 1000 lux



10 sec - 15 min



energy saving

3 years

manufacture's warranty
steinel.de/garantie3y



CE

Function description

Extremely bright, robust and vigilant: the LS 300 LED sensor-switched floodlight. On-demand light for illuminating large areas around buildings. Infrared sensor with 240° angle of coverage and 12 m reach. Light output 3092 lm, colour temperature 4000 K, power consumption 29,5 W. Robust aluminium floodlight head. Available in black or white.

LS 300 LED


black
 EAN 4007841 067571
 Article number 067571

Technical specifications

Dimensions (L x W x H)	186 x 213 x 241 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Sensor Technology	passive infrared
Output	29,5 W
Power consumption	30,4 W
Interconnection	No
Lichtstrom Gesamtprodukt	2704 lm
Gesamtprodukt Effizienz	92 lm/W
Colour temperature	4000 K
Colour variation LED	SDCM3
Colour Rendering Index	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L70B10
Base	without
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	240 °
Angle of aperture	180 °
Capability of masking out individual segments	Yes

Electronic scalability	No
Mechanical scalability	No
Reach, radial	r = 3.5 m (26 m ²)
Reach, tangential	r = 12 m (302 m ²)
Photo-cell controller	Yes
Twilight setting	2 – 1000 lx
Time setting	10 s – 15 Min.
Basic light level function	No
Soft light start	No
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	-10 – 30 °C
Housing material	Aluminium
Cover material	Glass transparent
Manufacturer's Warranty	3 years
Settings via	Potentiometers
Installation site	wall
Version	black
PU1, EAN	4007841067571

Detection Zone

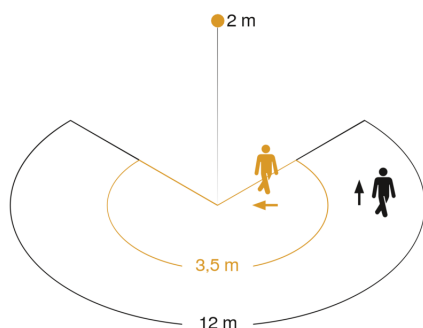

Mögliche Montagehöhe: 1,80 m – 4,00 m
 Orange: radial
 Schwarz: tangential

Dimension Drawing

