

Sensor-switched LED indoor light - Professional Line

# RS PRO S30 Q SC

Neutral white

EAN 4007841 067519

Article number 067519



LED

30 years (Ø 4,5h / day)

4000 K

4000K neutral white



high frequency sensor 360°



Ø 1 - 8 m



2 - 2000 lux



5 sec - 15 min



soft light start



10 - 50% basic brightness



manual override 4h



networkable wireless

## Function description

Intelligence is not a question of size. It's a question of inner values. The smartest luminaire in the world, now even better! High-frequency sensor luminaire RS PRO S-series, ideal for office corridors, hallways, toilet facilities, stairwells, including radio networking with other RS PRO S-series, 26 W LED, 2987 lm, PMMA cover, 4000 K, 360° detection, range Ø 1 - 8 m continuously adjustable, basic light function, and neighbourhood group function. The S-series can also be operated with direct current, which enables connection to central battery systems.

# RS PRO S30 Q SC

Neutral white

EAN 4007841 067519

Article number 067519



## Technical specifications

Dimensions (L x W x H)	331 x 331 x 56 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Sensor Technology	High frequency
Transmitter power	
Output	26 W
Power consumption	0,39 W
Interconnection	Yes
Type of interconnection	Master/master
Interconnection via	Bluetooth
Slave modeselectable	Yes
Lichtstrom Gesamtprodukt	2987 lm
Gesamtprodukt Effizienz	115 lm/W
Colour temperature	4000 K
Colour variation LED	SDCM3
Colour Rendering Index	= 82
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L80B50
Base	without
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection	also through glass, wood and stud walls
Detection angle	360 °
Angle of aperture	160 °
Capability of masking out individual segments	Yes
Electronic scalability	Yes

Mechanical scalability	No
Reach, radial	Ø 10 m (79 m <sup>2</sup> )
Reach, tangential	Ø 10 m (79 m <sup>2</sup> )
Continuous light	selectable
Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 60 Min.
Basic light level function	Yes
Basic light level function, detail	LED effect light
Basic light level function time	1-60 min
Main light adjustable	Yes
Functions	Group parameterisation, Manual ON / ON-OFF, Master/slave override, Neighbouring group function, Presence function, Data monitoring
Soft light start	Yes
Impact resistance	IK03
IP-rating	IP20
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, opal
Manufacturer's Warranty	5 years
Settings via	Bluetooth
With remote control	No
Installation site	wall, ceiling
Version	Neutral white
Total harmonic distortion (THD)	5,6
Power factor	0,9
PU1, EAN	4007841067519


# RS PRO S30 Q SC

Neutral white

EAN 4007841 067519

Article number 067519


## Detection Zone

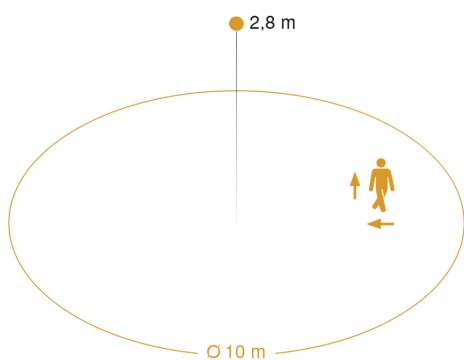


Mögliche Montagehöhe: 2,00 m – 4,00 m

Orange: radial und tangential

## Dimension Drawing

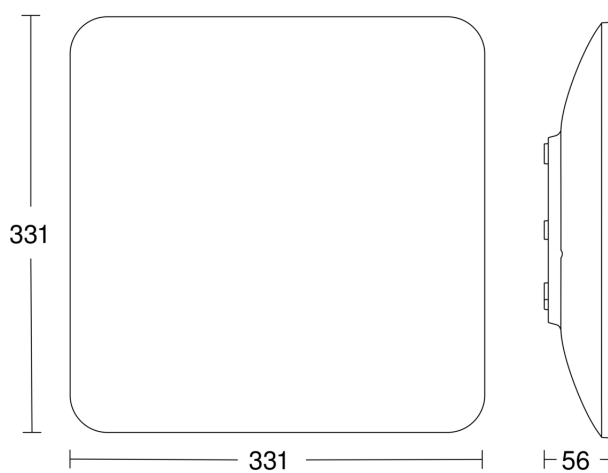

## Slave/wireless master interconnection circuit diagram



## Master/master interconnection circuit diagram

